


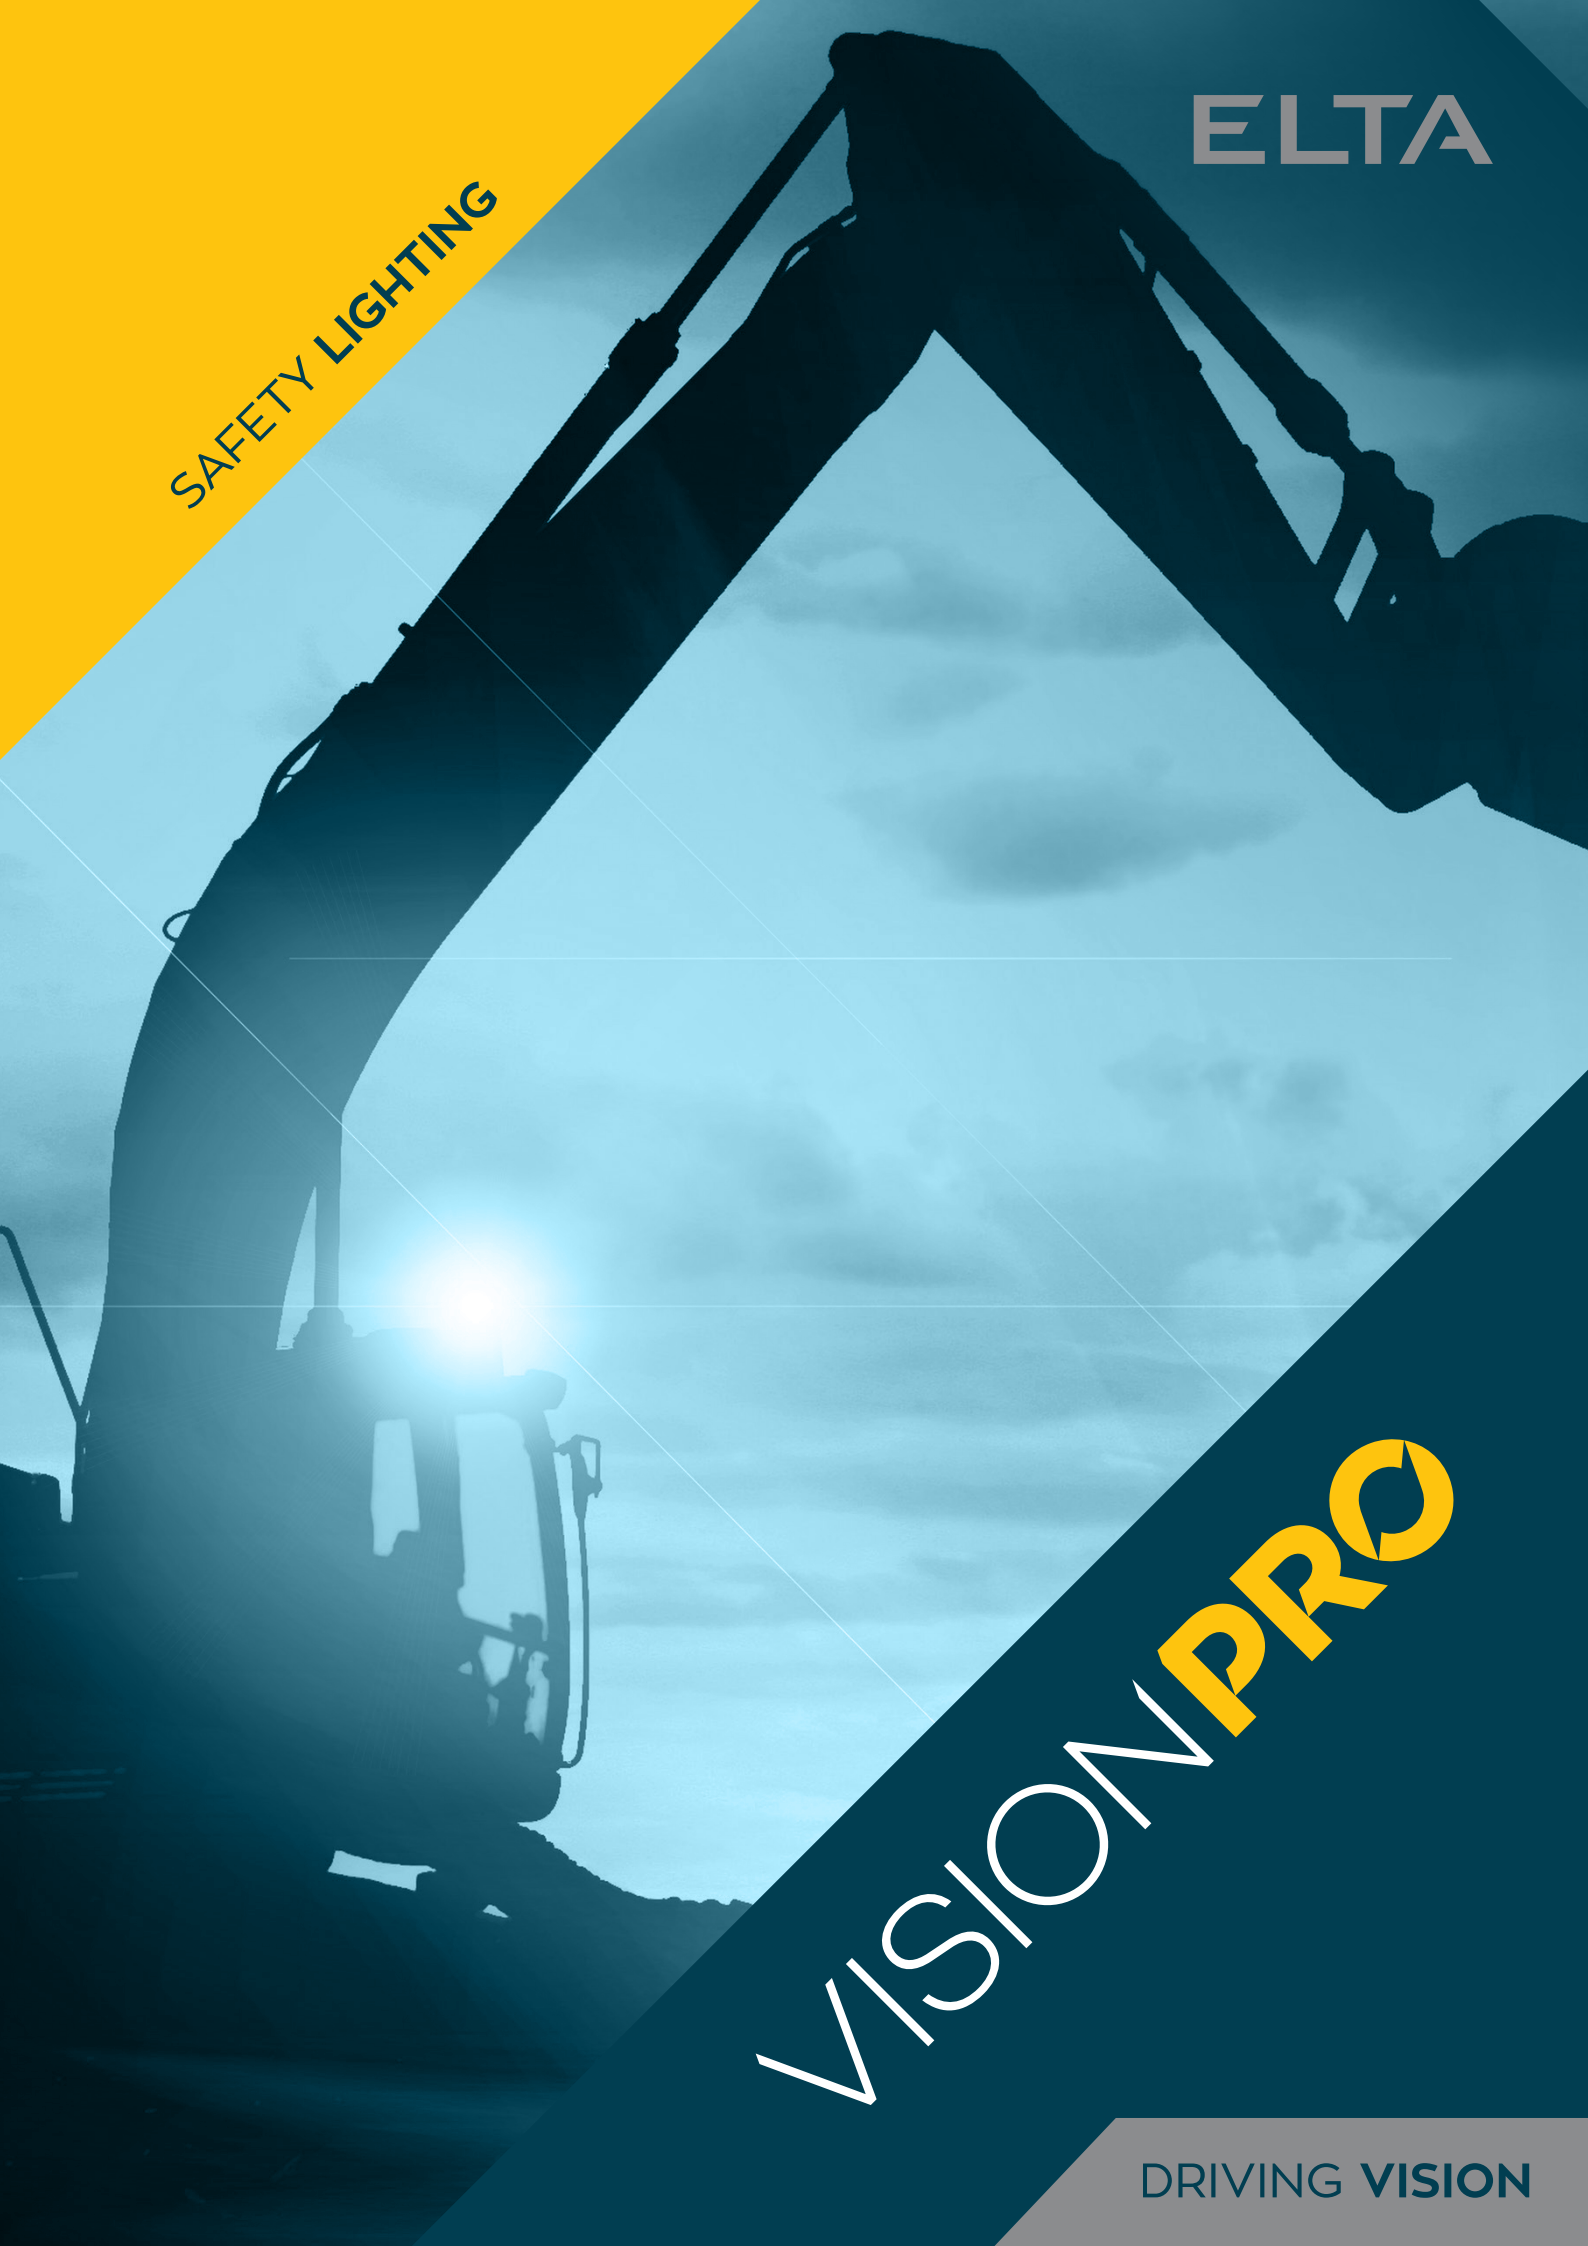

ELTA

SAFETY LIGHTING

VISION **PRO**

DRIVING VISION


VISIONPRO WARNING AND SAFETY

Car or commercial, industrial or agricultural, on or off-road, the new and improved range of amber beacons from **ELTA VisionPRO** has it covered. Halogen and LED beacons are available in DIN, flexi DIN, one bolt, three bolt and magnetic fittings for a multitude of applications. A **premium quality** range of work lamps and strobe lamps are also available in the range, delivering a comprehensive warning and safety offering.

Work Lights

| Part No. | Description                                                                                                                                                                                                                                      | ECE | Voltage  | Dimensions         |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|--------------------|
| EB8004   | <br>9 LED 3W / 27W Epistar LED chip<br>6500K, 1400lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)             | R10 | 10 - 30V | 108 x 45 x 125 mm  |
| EB8005   | <br>9 LED 3W / 27W Epistar LED chip<br>6500K, 1400lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)             | R10 | 10 - 30V | 126 x 50 x 115 mm  |
| EB8017   | <br>4 LED 3W / 12W CREE LED chip<br>1080lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)                       | R10 | 10 - 30V | 122 x 80 x 92 mm   |
| EB8018   | <br>6 LED 3W / 18W CREE LED chip<br>1620lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)                      | R10 | 10 - 30V | 82 x 80 x 90 mm    |
| EB8019   | <br>16 LED 3W / 48W Epistar LED chip<br>2400lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)                 | R10 | 10 - 30V | 108 x 65 x 134 mm  |
| EB8024   | <br>6 LED 3W / 18W CREE LED chip<br>1260lm, spot beam pattern, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)  | R10 | 10 - 30V | 161 x 56 x 71 mm   |
| EB8025   | <br>9 LED 3W / 27W Epistar LED chip<br>1400lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt) or magnetic base | R10 | 10 - 30V | 115 x 50 x 196 mm  |
| EB8026   | <br>6 LED 3W / 18W Epistar LED chip<br>900lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt) or magnetic base  | R10 | 10 - 30V | 111 x 55 x 62 mm   |
| EB8320   | <br>9 LED 10W / 90W LED chip<br>5500lm, IP67, die-cast aluminium housing with PC lens, stainless steel mounting bracket (with bolt)                         |     | 10 - 30V | 135 x 120 x 124 mm |

Strobe Lights
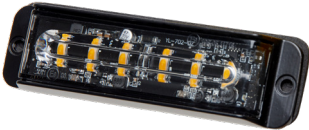
| Part No. | Description                                                                                                                                                                                                     | ECE       | Voltage | Dimensions       |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|------------------|
| EB8006   | <br>4 LED 5W / 20W AMBER<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability   | R10 + R65 | 9 - 30V | 110 x 17 x 36 mm |
| EB8007   | <br>6 LED 5W / 30W AMBER<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability   | R10 + R65 | 9 - 30V | 130 x 17 x 36 mm |
| EB8010   | <br>4 LED 5W / 20W BLUE<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability    | R10 + R65 | 9 - 30V | 110 x 17 x 36 mm |
| EB8011   | <br>6 LED 5W / 30W BLUE<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability  | R10 + R65 | 9 - 30V | 130 x 17 x 36 mm |
| EB8012   | <br>3 LED 3W / 9W AMBER<br>14 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability  | R10 + R65 | 9 - 30V | 106 x 34 x 30 mm |
| EB8013   | <br>4 LED 3W / 12W AMBER<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability | R10 + R65 | 9 - 30V | 96 x 28 x 19 mm  |
| EB8014   | <br>6 LED 5W / 30W AMBER<br>26 flash patterns, IP67,<br>polycarbonate light cover,<br>-30°C to +60°C temperature reliability | R10 + R65 | 9 - 30V | 128 x 28 x 19 mm |

Beacons

| Part No. | Description                                                                                                                                                                                                                                                                                            | ECE       | Voltage  | Dimensions              |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|-------------------------|
| EB8001   | <br>HALOGEN H1 BEACON, 1 flash pattern,<br>IP67, polycarbonate light cover, max. 110 km/h,<br>-30°C to +50°C temperature reliability,<br>3-bolt base, reverse polarity protection                                   | R10 + R65 | 12 - 24V | (H x Ø)<br>153 x 140 mm |
| EB8002   | <br>HALOGEN H1 BEACON, 1 flash pattern,<br>IP67, polycarbonate light cover, max. 110 km/h,<br>-30°C to +50°C temperature reliability,<br>Magnet base + cigar lighter connector, reverse<br>polarity protection      | R10 + R65 | 12 - 24V | (H x Ø)<br>167 x 140 mm |
| EB8003   | <br>40 SMD LED BEACON, 3 flash patterns, IP66,<br>polycarbonate light cover, max. 110 km/h, -30°C<br>to +50°C temperature reliability, magnet base<br>+ push-button cigar lighter, reverse polarity<br>protection   | R10 + R65 | 12 - 24V | (H x Ø)<br>94 x 130 mm  |
| EB8016   | <br>48 LED BEACON, 4 flash patterns, IP67,<br>polycarbonate light cover, max. 110 km/h, -30°C<br>to +60°C temperature reliability, magnet base<br>+ double switch cigar lighter, reverse polarity<br>protection   | R10 + R65 | 12 - 24V | (H x Ø)<br>59 x 151 mm  |
| EB8020   | <br>40 SMD LED BEACON, 3 flash patterns, IP67,<br>polycarbonate light cover, max. 110 km/h,<br>-30°C to +60°C temperature reliability, magnet<br>base + push-button cigar lighter, reverse<br>polarity protection | R10       | 12 - 24V | (H x Ø)<br>140 x 136 mm |
| EB8021   | <br>40 SMD LED BEACON<br>3 flash patterns, IP67, polycarbonate light cover,<br>max. 110 km/h, -30°C to +60°C temperature<br>reliability, 3-bolt base, reverse polarity<br>protection                              | R10       | 12 - 24V | (H x Ø)<br>122 x 136 mm |
| EB8022   | <br>40 SMD LED BEACON<br>3 flash patterns, IP67, polycarbonate light cover,<br>max. 110 km/h, -30°C to +60°C temperature<br>reliability, Din base, reverse polarity protection                                    | R10       | 12 - 24V | (H x Ø)<br>208 x 128 mm |



Beacons

| Part No. | Description                                                                                                                                                                                                                                                                                     | ECE       | Voltage                                 | Dimensions               |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------|--------------------------|
| EB8250   | <br>60 SMD LED BEACON, 3-flash patterns<br>IP67, polycarbonate light cover,<br>-30°C to +50°C temperature reliability,<br>3-bolt base, reverse polarity protection                                             | R10       | 12 - 24V                                | (H x Ø)<br>153 x 140 mm  |
| EB8251   | <br>60 SMD LED BEACON, 3 flash patterns<br>IP67, polycarbonate light cover,<br>-30°C to +50°C temperature reliability,<br>Magnet base + double switch cigar lighter,<br>reverse polarity protection            | R10       | 12 - 24V                                | (H x Ø)<br>167 x 1401 mm |
| EB8252   | <br>60 SMD LED BEACON, 3 flash patterns, IP67,<br>polycarbonate light cover, -30°C to +50°C<br>temperature reliability, DIN base, reverse<br>polarity protection                                               | R10       | 12 - 24V                                | (H x Ø)<br>239 x 128 mm  |
| EB8253   | <br>8 LED/3W BEACON, 4 flash patterns,<br>polycarbonate light cover, -30°C to +60°C<br>temperature reliability, magnet base + cigar<br>lighter connector, reverse polarity protection                        | R10 + R65 | 9 - 30V                                 | (H x Ø)<br>75 x 147 mm   |
| EB8321   | <br>8 LED/3W BEACON, 3 flash patterns, IP65,<br>polycarbonate light cover, -30°C to +60°C<br>temperature reliability, magnet base, AC and DC<br>Power supply, remote control,<br>4-6 h working time          | R10 + R65 | 7.4V/4400mAh<br>Rechargeable<br>battery | (H x Ø)<br>140 x 140 mm  |
| EB8240   | <br>16 SMD LED BEACON<br>5 flash patterns, IP65, polycarbonate light cover,<br>-30°C to +60°C temperature reliability, Photocell<br>function, 2 light intensity, 320/70 h working time<br>Strong magnet base | R10       | 2x9V batteries<br>(included)            | (H x Ø)<br>102 x 112 mm  |
| EB8241   | <br>8 LED/1W EMERGENCY SIGNAL LIGHT V16<br>Rotation flash pattern, IP65, polycarbonate light<br>cover, -30°C to +60°C temperature reliability,<br>Strong magnet base                                         | V16       | 9V battery<br>(included)                | (H x Ø)<br>52 x 74 mm    |

Accessories

| Part No. | Description                                                                                                                      | ECE | Voltage | Dimensions       |
|----------|----------------------------------------------------------------------------------------------------------------------------------|-----|---------|------------------|
| EB8008   | <br>REPLACEMENT DOME<br>for EB8001 and EB8002 |     |         |                  |
| EB8322   | <br>REPLACEMENT DOME<br>for EB8321            |     |         |                  |
| EB8009   | <br>EXTENSION CABLE 10m with double switch    |     |         | (LENGTH)<br>10 m |
| EB8308   | <br>single switch plug                      |     |         |                  |
| EB8309   | <br>double switch plug                      |     |         |                  |

Warning Lights

| Part No. | Description                                                                                                                                                                                                                                                                    | ECE       | Voltage | Dimensions           |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|----------------------|
| EB8015   | <br>2 LED 3W / 6W FORKLIFT LINE WORK LIGHT<br>red colour of light, one light / one line, IP67,<br>-30°C to +60°C temperature reliability, stainless<br>steel mounting bracket (with bolt) | R10       | 9 - 80V | 76 x 54 x 79 (56) mm |
| EB8023   | <br>72 SMD 36W MINI LED BAR AMBER<br>8 flash patterns, IP65, polycarbonate light cover,<br>-30°C to +50°C temperature reliability,<br>magnet base + double switch cigar lighter           | R10 + R65 | 9 - 30V | 280 x 165 x 58 mm    |

# ELTA | VISION **PRO**

**ELTA Automotive Limited (UK)**

27 Roman Way  
Coleshill  
B46 1HQ, UK  
+44 (0)1675 466999

**[sales@elta.co.uk](mailto:sales@elta.co.uk)**  
**[www.elta.co.uk](http://www.elta.co.uk)**

**ELTA Europe Co Ltd**

J. Murgaša 102  
94064 Nové Zámky  
Slovakia  
+421 (0) 35 69 226 11